

# 1999 Skywalk S50

---

- Mounted on 2007 Hino 338
- 57ft Crew Working Height
- 5000# max lift
- Asking \$90,000
- Optional Miller/Bobcat 225 amp welder for \$2500











## 16 foot long crew platform for maximum productivity


- 57ft maximum crew working height
- 360 degree turret rotation
- 350 degree platform rotation
- Full hydraulic control from turret and platform. No jerky electric solenoids.
- Max side reach with wide platform: 36.5ft
- Max side reach at platform tip: 49ft
- Max tip to tip side reach: 92ft
- Max 25ft “blind side” platform access on the rear of a sign opposite the truck setup
- Provision on turret for Oxy-Acetylene tanks
- AC receptacles at platform & rear bumper



Max side reach  
with platform  
parallel to wall:  
36.5ft

Max side reach  
to platform tip:  
49.3ft


Max tip-to-tip  
reach (requires  
removal of  
welder from  
bed): 96ft

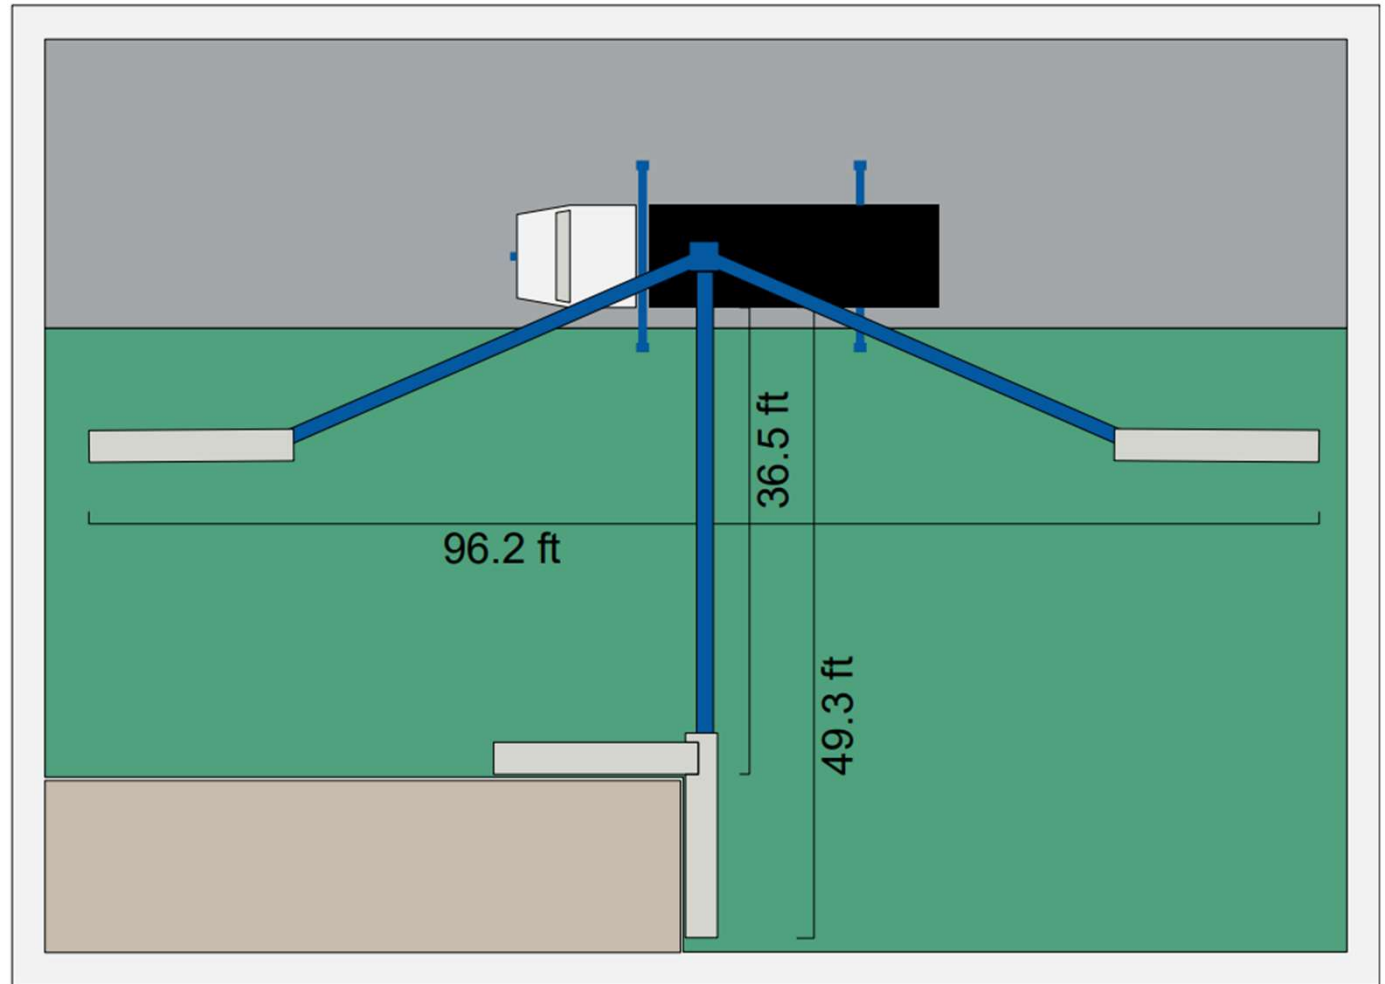

The “Blind Side” of signs can be accessed with articulated platform.

Left side “blind side” reach: 15ft

Right side “blind side” reach: 10ft

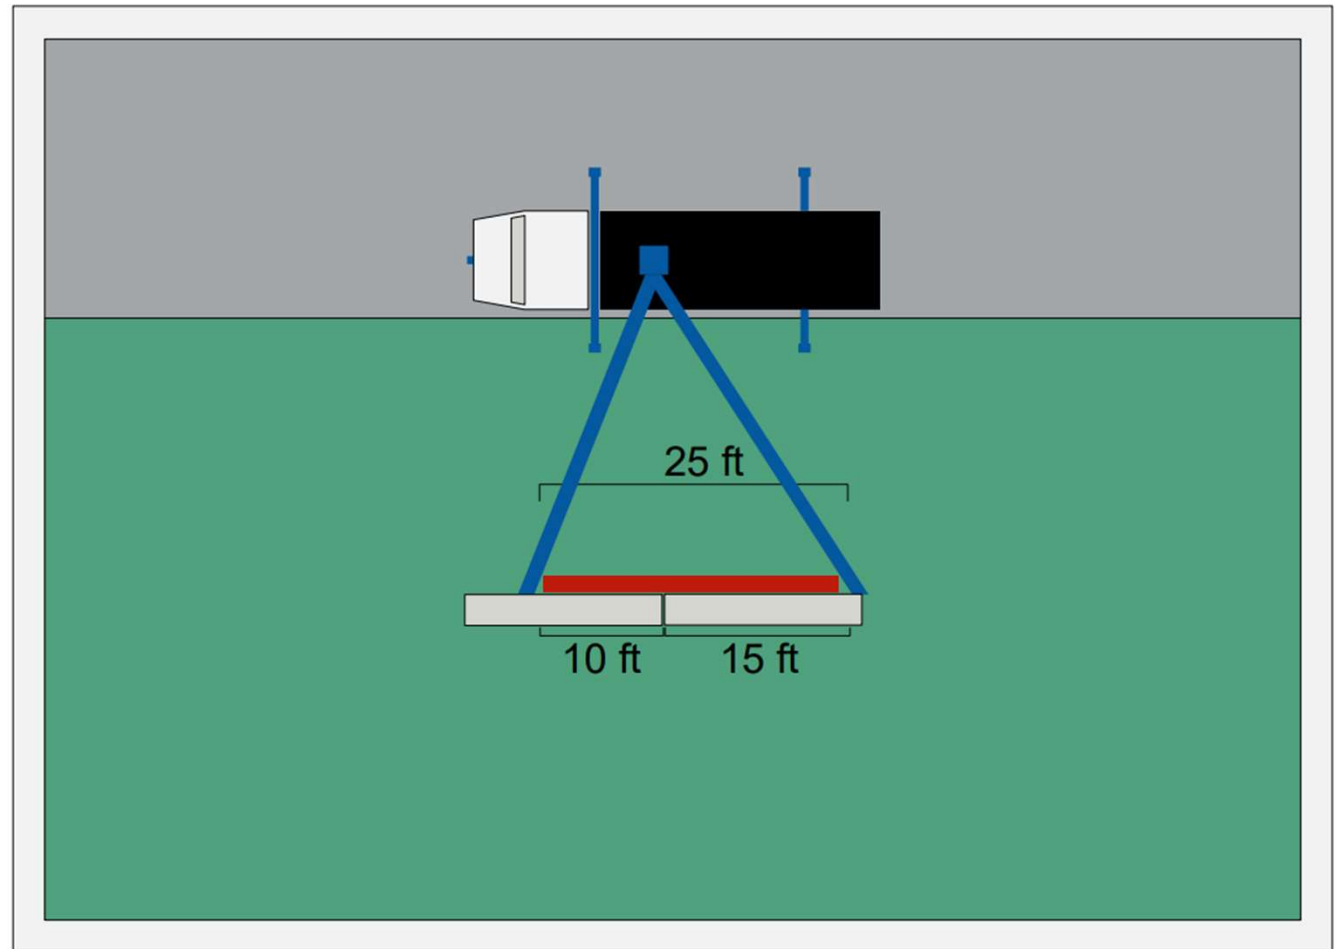



# 2006 Hino 338

- VIN: **5PVNV8JR372S50138**
- Mileage: **351116**
- Engine: **J08E-VB**
- Transmission: **Eaton FS6406A 6 speed manual**
- **Pre-emissions engine for extended idling**
- **Most tires are in good condition**
- **(5) 2ft x 2ft x 4ft underbed cabinets**
- **Body swap, full paint & service in 2017**
- **Optional 225 amp Miller Welder for additional \$2500**

# Known Issues

- **Left front tire due for replacement**
- **Will occasionally jump out of second gear when releasing throttle**
- **Boom and outrigger safety labels due for replacement**
- **Right rear outrigger slider piston has a minor leak**

# Optional Gas Powered Welder

Miller Bobcat 225

225amp AC welder for stick or wire

120v/240v AC power output

12v/24v/36v DC battery charger output

**Optional 1/0 welding cables \$250**

- Work Cable: 50ft with twist-lock terminal & stinger
- Ground Cable: 30ft with twist-lock terminal & ground clamp

